



### ■ Main Features


- ] High efficiency and compact size
- ] Active PFC
- ] Wide input voltage range 170...550Vac
- ] Wide output voltage range 36...205Vdc, user settable
- ] 2 user programmable voltage steps with settable duration
- ] Digital Power regulation
- ] Remote ON/OFF or other remote control functions possible through ENABLE input
- ] Multiple protections
- ] Ideal for elevator application
- ] Excellent versatility, allowing parts stock savings
- ] Up to 50°C operating temperature with no derating

## TECHNICAL DATA

Model type	SBP200	
<b>OUTPUT DATA</b>		
Rated voltage	36...205Vdc	
Adj. output voltage range	36...205Vdc (1V resolution programmable)	
Continuous current	2.3A Max. or $V_{out} \times I_{out} = 187W$ Max. for $V_{out} > 80Vdc$	
Overload limit	2.4A	
Short circuit peak current	2.5A	
Load regulation	$\leq 1\%$	
Ripple & Noise <sup>1</sup>	$\leq 600mVpp$	
Hold up time	$\geq 30ms$	
Protections	<ul style="list-style-type: none"> <li>▪ Overload and short circuit with constant current (3s) and one shot (no auto recovery)</li> <li>▪ Thermal protection</li> <li>▪ Input undervoltage lockout (UVLO)</li> <li>▪ Input overvoltage protection (VDR)</li> </ul>	
Status Signals	<ul style="list-style-type: none"> <li>▪ 7 segment, 3 digits display</li> <li>▪ 3 programming keys</li> <li>▪ <b>ENABLE</b> - Insulated remote ON/OFF input, active for 12...230Vac/dc</li> </ul>	
Parallel connection	Possible with external ORing module	
<b>INPUT DATA</b>		
Input AC rated voltage <sup>2</sup>	Nominal: 1/2 phases 200...500Vac	
Frequency	Range: 170...550Vac 47...63Hz	
Input DC rated voltage	250...725Vdc	
Input AC rated current		
Vin = 200Vac	1.4A	
Vin = 500Vac	0.5A	
Input DC rated current		
Vin = 250Vdc	1.4A	
Vin = 725Vdc	0.7A	
Standby power	< 6W	
Power Factor Correction	Active > 0.9	
Inrush peak current	$\leq 50A$	
Touch (leakage) current	$\leq 0.3mA$	
Internal Protection fuse	None, external fuse must be provided	
Recommended external protection	MCB 6A C or 4A D curve It is strongly recommended to provide external surge arresters (SPD) according to local regulations.	
<b>GENERAL DATA</b>		
Efficiency	> 87%	
Dissipated power	< 28W	
Operating temperature <sup>3</sup>	- 40°C...+ 70°C	
Derating	- 4.2W/°C over 50°C (do not exceed $V_{out} \times I_{out} = 100W$ Max. at 70°C)	
Storage temperature	- 40°C...+ 80°C	
Humidity	5...95% r.H. non condensing	
Life time expectation	71'686h (8.1 years) at 25°C ambient full load	
Overvoltage category	▪ EN50178	III
Pollution degree	▪ IEC60664-1	2
Input / output isolation	4.2kVdc	
Input / ground isolation	3.4kVdc	
Input / ENABLE isolation	4.2kVdc	
Output / ground isolation	1.65kVdc	
Output / ENABLE isolation	4.2kVdc	
ENABLE / ground isolation	4.2kVdc	
Safety Standards	<ul style="list-style-type: none"> <li>▪ UL508 (reference)</li> <li>▪ EN60950 (certified)</li> <li>▪ EN50178 (reference)</li> </ul>	
EMC Emission	<ul style="list-style-type: none"> <li>▪ EN55011 (CISPR11) Class A</li> <li>▪ EN55022 (CISPR22) Class A</li> <li>▪ EN12015 Class A</li> <li>▪ EN61000-3-2 Class A</li> </ul>	
EMC Immunity	<ul style="list-style-type: none"> <li>▪ EN61000-4-2 Level 3</li> <li>▪ EN61000-4-3 Level 3</li> <li>▪ EN61000-4-4 Level 3</li> <li>▪ EN61000-4-5 Level 4</li> <li>▪ EN61000-4-11 Level 2</li> <li>▪ EN12016</li> </ul>	
Protection degree	▪ EN60529	IP20
Vibration sinusoidal	▪ IEC60068-2-6	(5-17.8Hz: $\pm 1.6mm$ ; 17.8-500Hz: 2g 2hours / axis (X,Y,Z)
Shock	▪ IEC60068-2-27	(30g 6ms, 20g 11ms; 3 bumps / direction, 18 bumps total)
Connection terminals	2.5mm <sup>2</sup> , screw type pluggable (24...12AWG)	

Case material	Aluminum
Weight	0.75kg
Size (W x H x D)	80.0 x 120.0 x 100.0mm
<p>1) Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.                  2) CB Scheme certified up to 528Vac.                  3) Start-up type tested: - 40°C, possible at nominal voltage with load deration.</p> <p><b>Notes:</b>                  - For more details, performance and descriptions regarding all parameters not indicated in the above table, please refer to the instruction manual downloadable from <a href="http://www.nextys.com">www.nextys.com</a>                  - Technical parameters are typical, measured in laboratory environment at 25°C and 400Vac / 50Hz, at nominal values, after minimum 5 minutes of operation.                  - Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.                  - Data may change without prior notice in order to improve the product.</p>	

**DIMENSIONS**

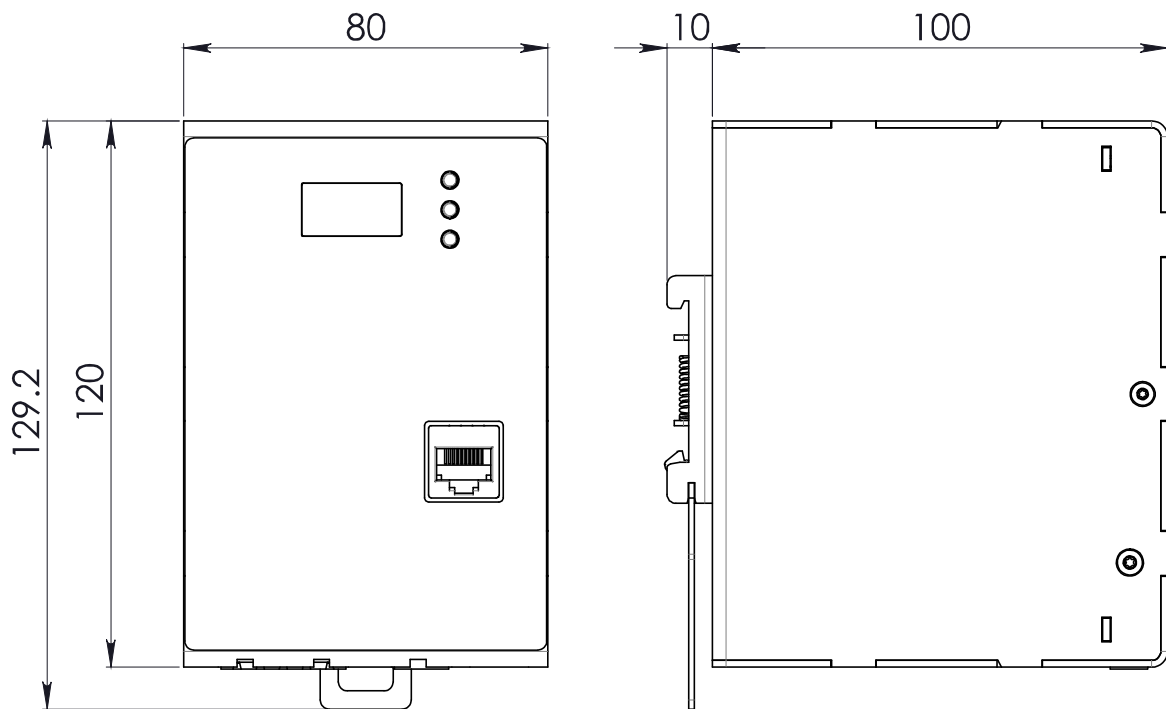

**CONNECTION**



**Input Connection:**

- Single phase:
- L1 = Line
  - N = Neutral
  - | = Earth ground
- 2 phases:
- L1 = Phase 1
  - L2 = Phase 2
  - | = Earth ground

**DC:**

- L1 = + Positive DC
- L2 = - Negative DC
- | = Earth ground

**ENABLE: (12...230Vac/dc)**

- E+ = Positive DC
- E- = Negative DC

**Output Connection:**

- + = Positive DC
- - = Negative DC